


JT-60U $\langle n \rangle \tau T_{i0}$ from ITERL-Database

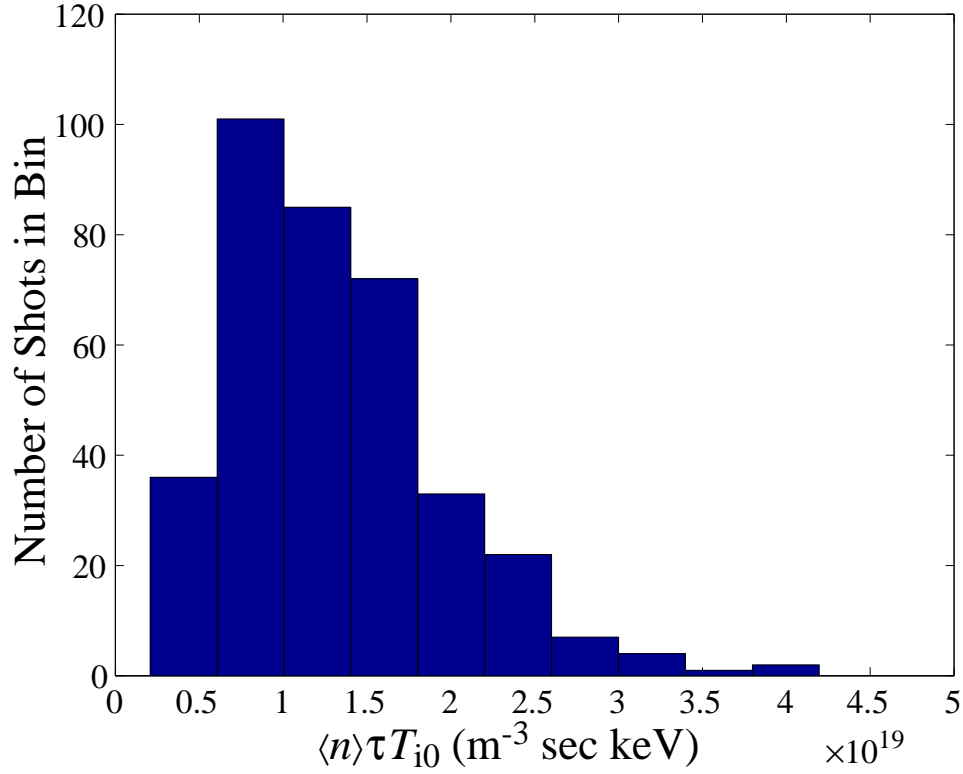

The mean value and the standard deviation of $\langle n \rangle \tau T_{i0}$ in this histogram are 1.31 and 0.65 in the units of $10^{19} \text{ m}^{-3} \text{ s keV}$.

Symbol in Database	NEL	TAUTH	TI0	
Shot #	$\langle n \rangle (10^{19} \text{ m}^{-3})$	τ (s)	T_{i0} (keV)	$\langle n \rangle \tau T_{i0} (10^{19} \text{ m}^{-3} \text{ s keV})$
JT-60U 5436	*9.0	0.12	2.2	2.4
JT-60U 1709	7.7	*0.51	1.08	4.2
JT-60U 3962	2.8	0.042	*10.2	1.2
JT-60U **			45	$n_D(0) \tau_E T_{i0} = 1.5 \times 10^2$
IGNITOR	62	0.60	12.6	4.7×10^2
ITER-FEAT	9.7	2.0	22	4.3×10^2

*: maximum value for JT-60U in ITERL database.

** : A high $\langle n \rangle \tau T_{i0}$ value achieved in 1996 for JT-60U is shown.

(<http://www-jt60.naka.jaeri.go.jp/html/rep36.html>)